

SYMMETRIC LIFTS *WIDER DRIVE THRU FOR TRUCKS AND VANS*

SPO10 10,000 LBS. CAPACITY

THE PROVEN STANDARD

Trust the industry standard symmetrical 10,000 lb. lift. Why look anywhere else?

- Customize With Your Choice Of Arms and Adapters
- Performance tested to 20,000 lift cycles
- Available with SHOCKWAVE
- ALI Gold Certified

Rotary Lift has built quality into every two-post they've designed. The SPO10 has proven this time and time again. With features like the original single piece "double S" shaped column, true asymmetric columns, three position flip-up adapters, available 3-stage arms with thread-up or truck adapters and extended height models, the SPO10 delivers everything your shop needs.

Available with **SHOCKWAVE™**

SHOWN WITH: **Three-stage flip-up adapters with built-in height adapters on standard 2-stage arms # SPO10**
10,000 lbs. capacity



ALSO AVAILABLE WITH

- **Three-stage arms with RA Adapters / #SPO10-RA / 10,000 lbs. capacity**
- **Three-stage arms with Truck Adapters / SPO10-TA / 10,000 lbs. capacity**



Model shown: SPO10N700RD
Shown with optional accessories and additional equipment
SPO10-SW Minimum Required Ceiling Height: 12' 4-3/4"

SPO12 12,000 LBS. CAPACITY

THREE STAGE ARMS for GREATER REACH

The Rotary SPO12 sets the standard for reliability and quality in 12,000 lb. capacity lifts.

- Front & rear three-stage arms are standard
- Truck adapters with stackable inserts for added reach
- Available in alternate height configurations
- Available with SHOCKWAVE
- ALI Gold Certified

More dealers and independent repair shops choose the Rotary SPO12 because of its reputation for quality and reliability. With a standard feature set that can't be beat, it's easy to see why. Customizable features include low ceiling or extended height settings. Or choose to supercharge your lift with a Shockwave-equipped model.

Available with **SHOCKWAVE™**

Standard with three-stage **FRONT arms and polymer truck adapters** primarily used on framed vehicles. Adapters thread-up or have optional stackable inserts.




SPO12-TA
12,000 lbs. capacity

Model shown: SPO12N7TOBL
Shown with optional accessories and additional equipment



Available with **SHOCKWAVE™**




SPO10
Standard Arms
Flip Up Adapters



SPO10-RA
Three-Stage Arms
Round Adapters




SPO10-TA
Three-Stage Arms
Truck Adapters



SPO12-TA
Three-Stage Arms
Truck Adapters

Model:	SPO10 Standard Arms Flip Up Adapters	SPO10-RA Three-Stage Arms Round Adapters	SPO10-TA Three-Stage Arms Truck Adapters	SPO12-TA Three-Stage Arms Truck Adapters
SHOCKWAVE Models	SPO10-SW SHOCKWAVE LIFT	SPO10-RASW SHOCKWAVE LIFT	SPO10-TASW SHOCKWAVE LIFT	SPO12-SW SHOCKWAVE LIFT
Rise*	72 5/8" - 78 1/8" (1845 - 1984mm)	72 1/2" - 74 3/4" (1841 - 1898mm)	72 5/8" - 75 5/8" (1845 - 1921mm)	72 3/4" - 75 3/4" (1848 - 1924mm)
WITH SHOCKWAVE	75 5/8" - 81 1/8" (1921 - 2061mm)	75 1/2" - 77 3/4" (1918 - 1978mm)	75 5/8" - 78 5/8" (1921 - 1997mm)	75 3/4" - 78 3/4" (1924 - 2000mm)
Height Overall: Standard	11' 8 1/2" (3569mm)	11' 8 1/2" (3569mm)	11' 8 1/2" (3569mm)	13' 8" (4166mm)
B. EH1	12' 8 1/2" (3873mm)	12' 8 1/2" (3873mm)	12' 8 1/2" (3873mm)	14' 8" (4470mm)
EH2	13' 8 1/2" (4178mm)	13' 8 1/2" (4178mm)	13' 8 1/2" (4178mm)	15' 8" (4775mm)
C. Width Overall** (outside of base plate)	11' 5 1/2" (3493mm)	11' 5 1/2" (3493mm)	11' 5 1/2" (3493mm)	11' 5 5/8" (3496mm)
D. Drive-Thru Clearance	102 1/2" (2603mm)	102 1/2" (2603mm)	102 1/2" (2603mm)	102 3/8" (2600mm)
E. Floor To Overhead Switch	11' 2 3/4" (3423mm)	11' 2 3/4" (3423mm)	11' 2 3/4" (3423mm)	13' 3 1/8" (4042mm)
F. Reach (front arm min.)	31" (787mm)	27 1/2" (699mm)	27 1/2" (699mm)	27 1/2" (699mm)
G. Reach (front arm max.)	54" (1372mm)	59" (1499mm)	59" (1499mm)	59" (1499mm)
H. Reach (rear arm min.)	31" (787mm)	27 1/2" (699mm)	27 1/2" (699mm)	27 1/2" (699mm)
I. Reach (rear arm max.)	54" (1372mm)	59" (1499mm)	59" (1499mm)	59" (1499mm)
J. Min. Adapter Height	4 5/8" (118mm)	4 1/2" (114mm)	4 5/8" (118mm)	4 3/4" (121mm)
Max. Adapter Height	N/A	6 3/4" (171mm)	7 5/8" (194mm)	7 3/4" (197mm)
K. Low Step Height	7" (178mm)	N/A	N/A	N/A
L. High Step Height	10 1/4" (260mm)	N/A	N/A	N/A
M. Inside Columns	114 1/2" (2908mm)	114 1/2" (2908mm)	114 1/2" (2908mm)	114 7/8" (2918mm)
N. Cylinder Height at full rise*	11' 10 3/4" (3626mm)	11' 10 3/4" (3626mm)	11' 10 3/4" (3626mm)	11' 10 3/4" (3626mm)
WITH SHOCKWAVE	12' 4 1/2" (3772mm)	12' 4 1/2" (3772mm)	12' 4 1/2" (3772mm)	12' 4 1/2" (3772mm)
Lifting Capacity	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)	12,000 lbs. (5443kg)
Motor / Voltage***	2 HP / 208v-230v	2 HP / 208v-230v	2 HP / 208v-230v	2 HP / 208v-230v
WITH SHOCKWAVE	5 HP / 110v	5 HP / 110v	5 HP / 110v	5 HP / 110v
Time of Full Rise	45 seconds	45 seconds	45 seconds	60 seconds
WITH SHOCKWAVE	25 seconds	25 seconds	25 seconds	25 seconds
Ceiling Height Required:				
Standard	12' (3658mm)	12' (3658mm)	12' (3658mm)	13' 9" (4191mm)
WITH SHOCKWAVE	12' 6" (3810mm)	12' 6" (3810mm)	12' 6" (3810mm)	13' 9" (4191mm)
EH1	12' 10" (3912mm)	12' 10" (3912mm)	12' 10" (3912mm)	14' 9" (4496mm)
EH2	13' 10" (4216mm)	13' 10" (4216mm)	13' 10" (4216mm)	15' 9" (4801mm)
Max Load (per arm)	2,500 lbs. (1134kg)	2,500 lbs. (1134kg)	2,500 lbs. (1134kg)	3,000 lbs. (1360kg)
Min. Bay Size	12' x 24' (3658 x 7315mm)	12' x 24' (3658 x 7315mm)	12' x 24' (3658 x 7315mm)	12' x 26' (3658 x 7925mm)

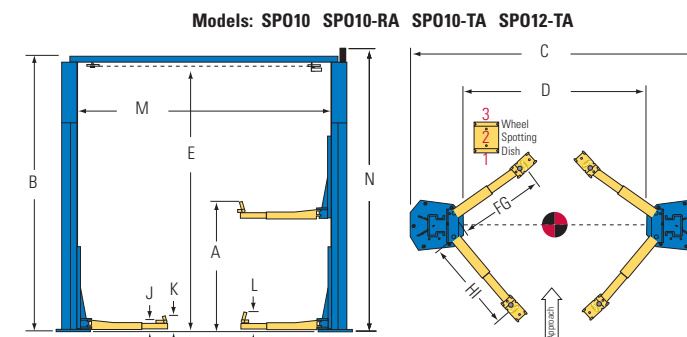

* Rise measures lowest or highest position of the supplied adapters from floor to full cylinder stroke.
 ** Overall heights and widths reflect standard settings. Alternate settings may be available, refer to Installation Instruction Manual or consult factory for details.
 *** Optional 3-phase electrical available.

Standard color of lifts are blue and red unless otherwise noted. Gray and black are available at no additional charge. Additional colors are available, consult your Rotary® representative for details.

	RAL5005		RAL3002
	RAL7040		RAL9005